


XCS1.5K Loudspeaker

- The XCS1.5K Center Channel Loudspeaker is an important piece of the puzzle to create a cinematic, immersive experience in a home theater system that uses our XRT2.1K or XRT1.1K Floor Standing Loudspeakers as the front left and front right speakers.
- The center channel speaker is a critical component in a home cinema system as a vast majority of dialog and other key sounds emanate from the center speaker – thus making it essential that it produces a high quality, clear sound. The XCS1.5K has been meticulously engineered for this exact purpose.
- The XCS1.5K has been voiced to match both the XRT2.1K and XRT1.1K, ensuring proper timbre of vocals and sounds as the sonic image moves across the virtual stage in front of you.
- Uses our line array speaker design where the midranges and tweeters are installed in an array mounted forward of the woofers. Forty three individual drivers deliver unparalleled sound reproduction.
- Crossover networks are phase matched between the low frequency, midrange, and high frequency sections to ensure a smooth frequency response over the entire audible range.
- Bass cabinet is a combination of brushed and black aluminum and is finished with 7 layers of high gloss piano black paint. Line array mimics the timeless McIntosh front panel appearance with a black center section and silver trim. Grilles magnetically attach for easy removal.
- McIntosh gold-plated Solid Cinch™ speaker binding posts easily but securely attach your speaker cables to prevent them from coming loose while also ensuring a quality signal is delivered to the speaker.

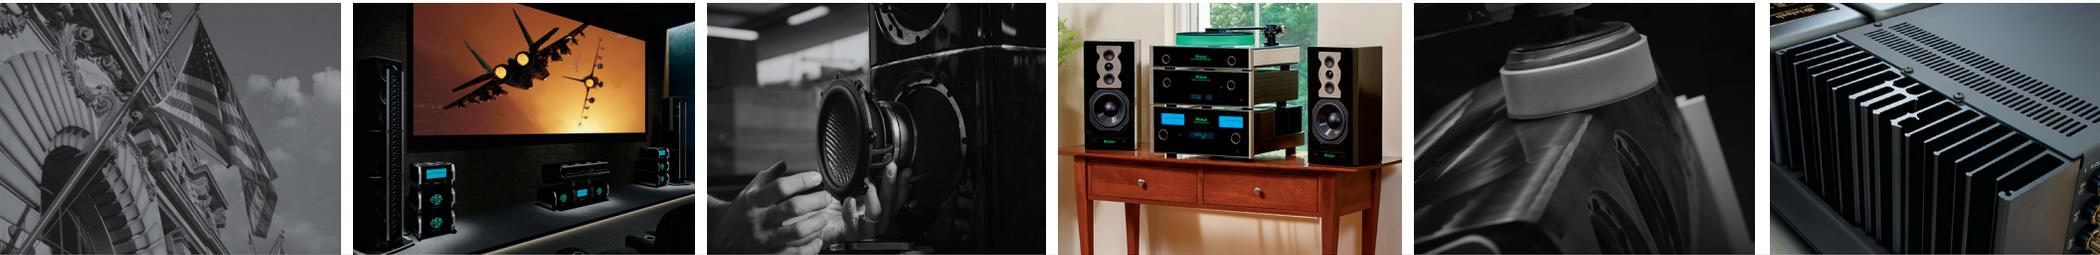

The Center of an Unrivaled Home Theater Experience

McIntosh®

LEGENDARY PERFORMANCE®

www.mcintoshlabs.com

XCS1.5K Loudspeaker

System Type:

3- and 4-way, Ported, Center Channel

Sensitivity:

88dB

Overall Dimensions (W x H x D):

49-31/32" (126.92cm) x 17-3/16" (43.66cm)
x 21-7/32" (53.9cm)

Nominal Impedance:

8 Ohms

Crossover Frequencies:

150Hz, 500Hz, 3kHz

Weight:

178 lbs (80.74 kg) net;
209 lbs (94.79 kg) in shipping carton

Power Handling:


1,500 Watts

Drivers:


Woofers: (4) 8" Long Throw
Carbon Fiber Sandwich Cone
Midranges: (14) 2.5" Aluminum Dome
Tweeters: (25) 3/4" Aluminum Dome

Frequency Response:

32Hz - 20kHz

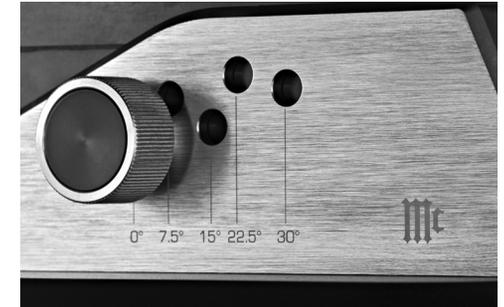

Top: The XCS1.5K can be tilted in its base to one of five preset angles so the speaker can be optimally aimed towards your listening position. **Bottom:** Separate pairs of our Solid Cinch™ speaker binding posts are available for the mid/high, low, and subwoofer frequencies to allow for bi- or tri-amping or bi- or tri-wiring.

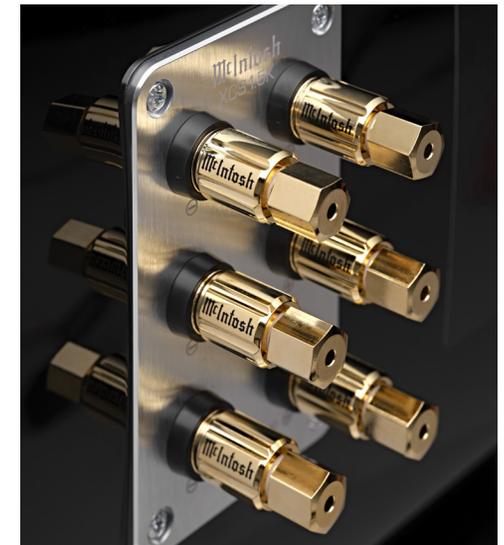

For the Consumer's Protection:

In order to ensure the highest level of customer satisfaction, new McIntosh products may only be purchased from an Authorized McIntosh Dealer; and, with certain limited exceptions may only be purchased over-the-counter or delivered and installed by the Authorized McIntosh Dealer. McIntosh does not warrant, in any way, products that are purchased from anyone who is not an Authorized McIntosh Dealer, or that have had their serial numbers altered or defaced.

Companion Products

The MC2KW or MC1.25KW Amplifiers, C12000 Preamp, MX180, MX123 or MX100 A/V Processors, XRT2.1K and XRT1.1K Floor Standing Speakers, WS500 and WS300 In-Wall Speakers, CS200 In-Ceiling Speaker, and McIntosh Speaker Cables are logical companions for the XCS1.5K Center Channel Loudspeaker. Your Authorized Dealer can provide additional information on other McIntosh product combinations.

To learn more, please call us at 1.800.538.6576.

McIntosh®

LEGENDARY PERFORMANCE®

www.mcintoshlabs.com