


MAC7200 Rear Panel Connections

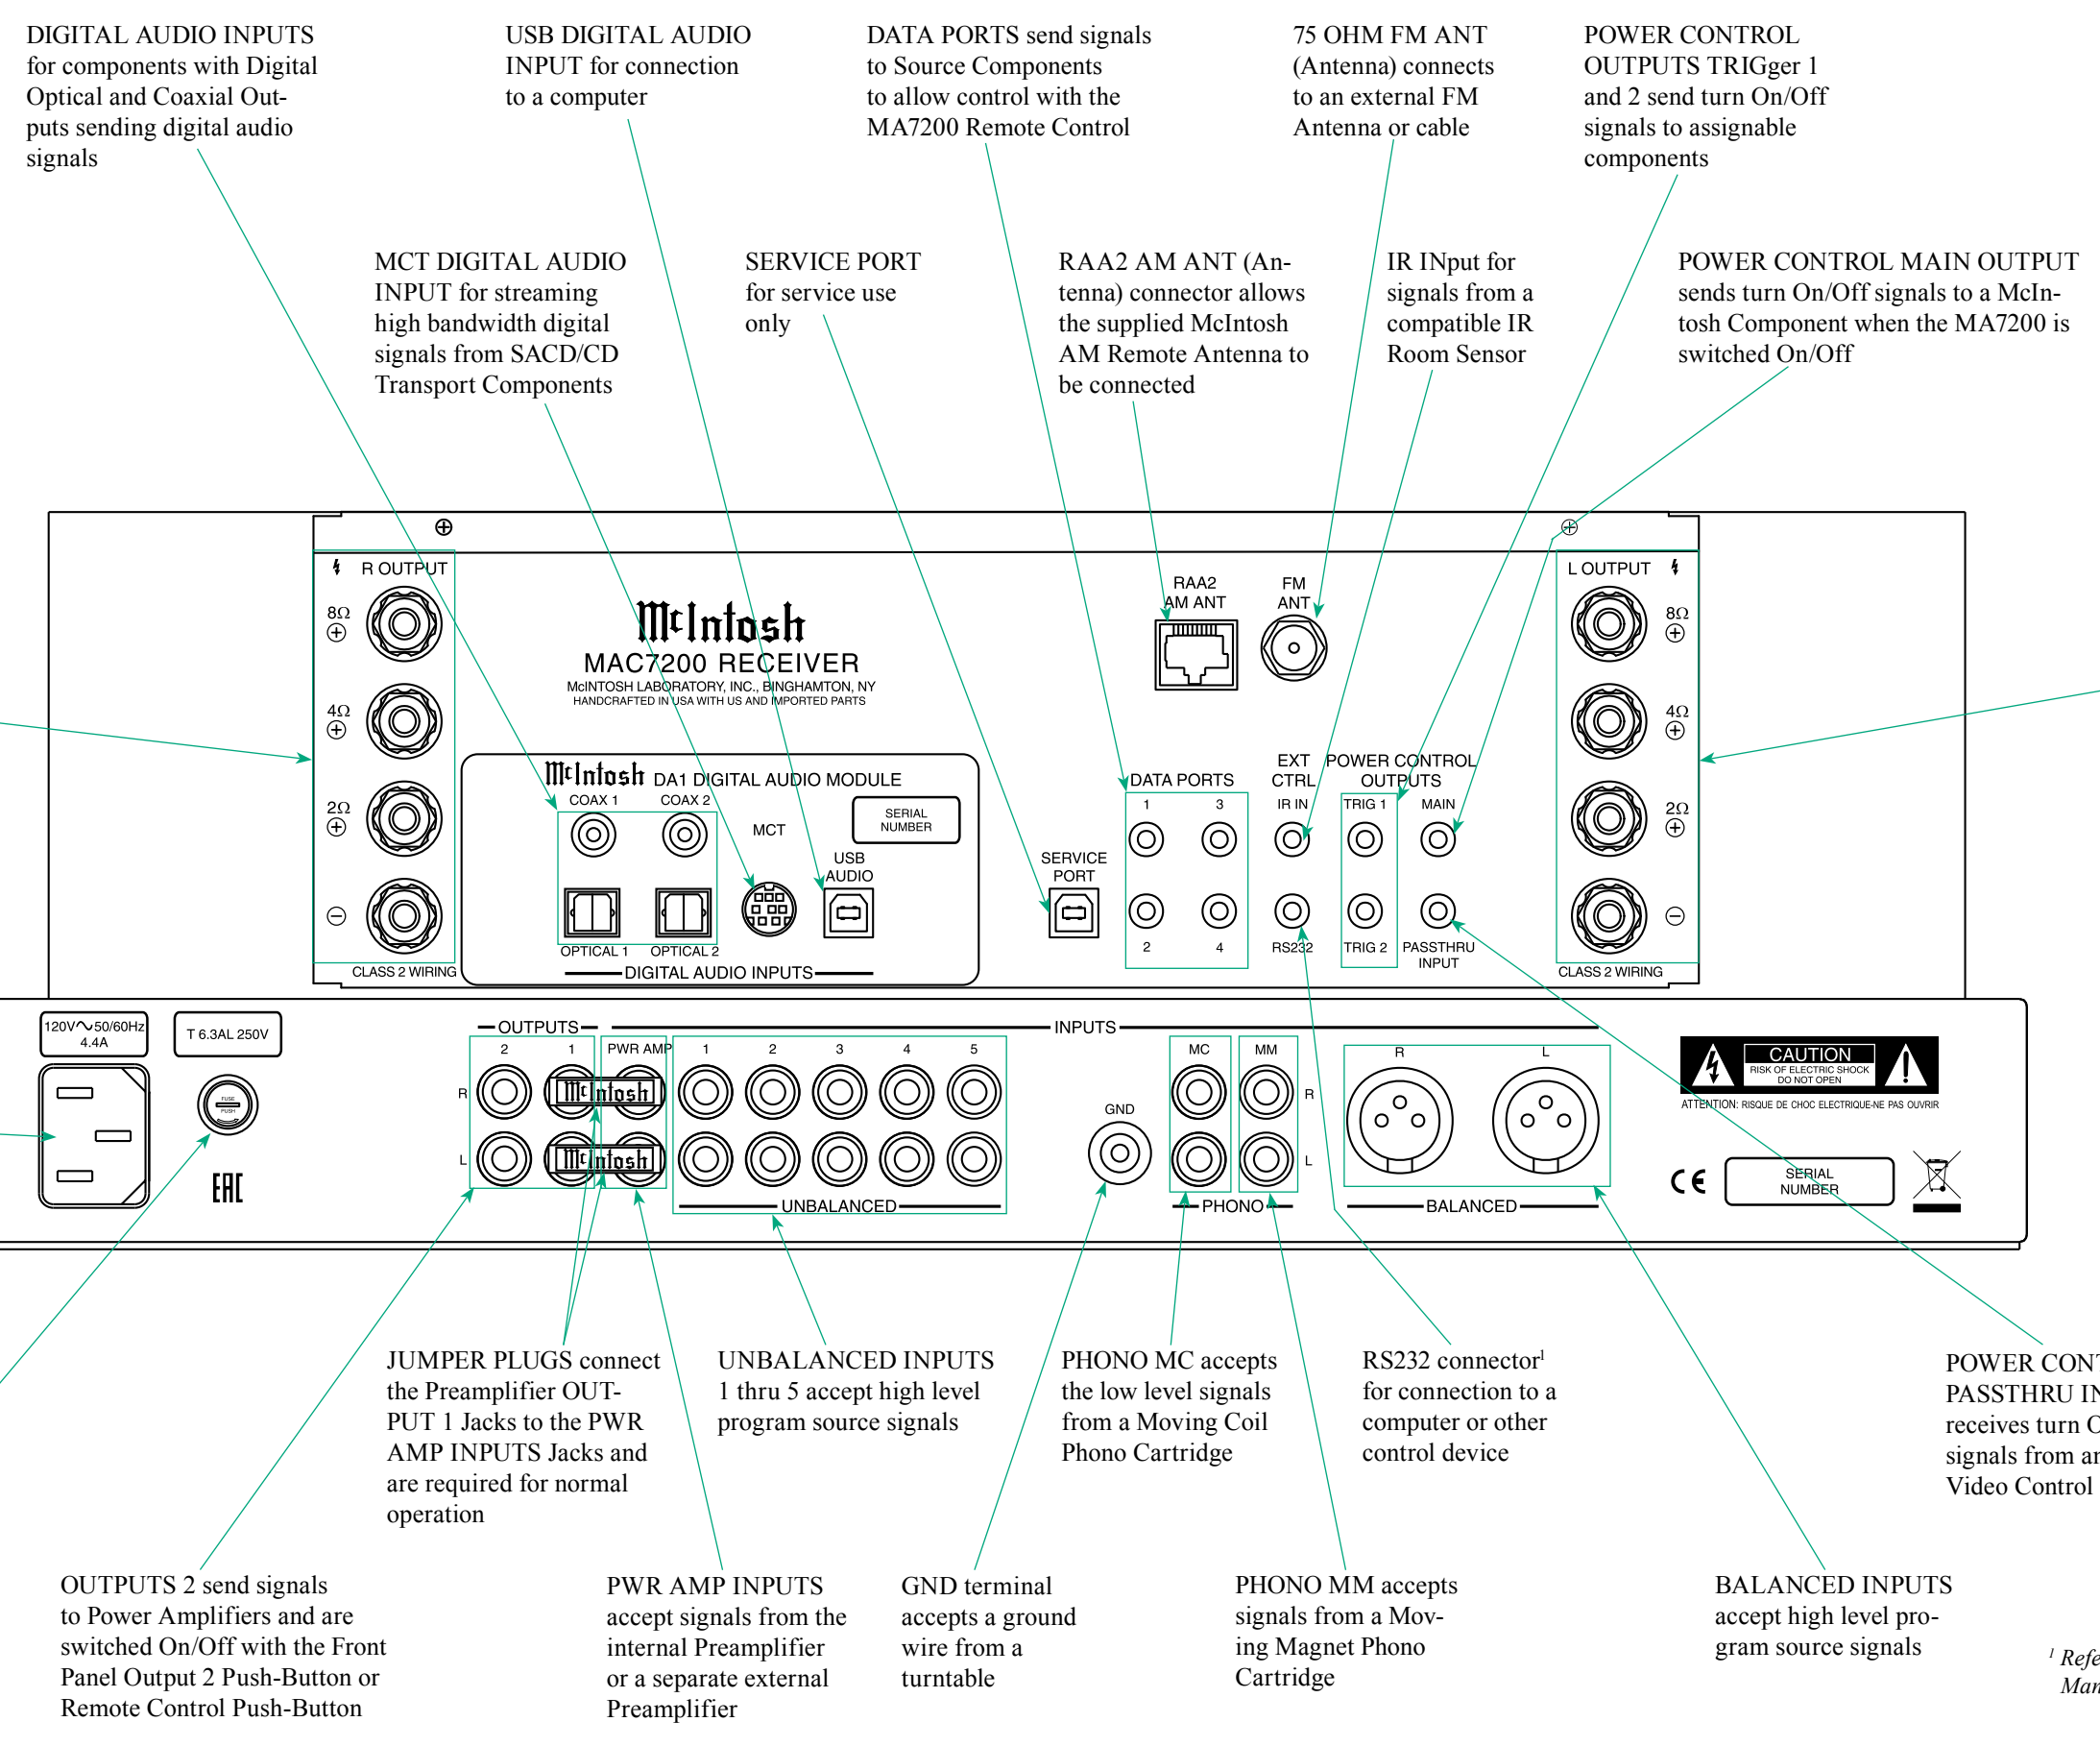

DIGITAL AUDIO INPUTS for components with Digital Optical and Coaxial Outputs sending digital audio signals

USB DIGITAL AUDIO INPUT for connection to a computer

DATA PORTS send signals to Source Components to allow control with the MA7200 Remote Control

75 OHM FM ANT (Antenna) connects to an external FM Antenna or cable

POWER CONTROL OUTPUTS TRIGger 1 and 2 send turn On/Off signals to assignable components

MCT DIGITAL AUDIO INPUT for streaming high bandwidth digital signals from SACD/CD Transport Components

SERVICE PORT for service use only

RAA2 AM ANT (Antenna) connector allows the supplied McIntosh AM Remote Antenna to be connected

IR INput for signals from a compatible IR Room Sensor

POWER CONTROL MAIN OUTPUT sends turn On/Off signals to a McIntosh Component when the MA7200 is switched On/Off

Right OUTPUT connections for a 2, 4 or 8 ohm Loudspeaker

Left OUTPUT connections for a 2, 4 or 8 ohm Loudspeaker

Connect the MAC7200 power cord to a live AC outlet. Refer to information on the back panel of your MAC7200 to determine the correct voltage for your unit

Main Fuse holder, refer to information on the back panel of your MAC7200 to determine the correct fuse size and rating

OUTPUTS 2 send signals to Power Amplifiers and are switched On/Off with the Front Panel Output 2 Push-Button or Remote Control Push-Button

PWR AMP INPUTS accept signals from the internal Preamplifier or a separate external Preamplifier

GND terminal accepts a ground wire from a turntable

PHONO MM accepts signals from a Moving Magnet Phono Cartridge

BALANCED INPUTS accept high level program source signals

JUMPER PLUGS connect the Preamplifier OUTPUT 1 Jacks to the PWR AMP INPUTS Jacks and are required for normal operation

UNBALANCED INPUTS 1 thru 5 accept high level program source signals

PHONO MC accepts the low level signals from a Moving Coil Phono Cartridge

RS232 connector¹ for connection to a computer or other control device

POWER CONTROL PASSTHRU INPUT receives turn On/Off signals from an Audio/Video Control Center

¹ Refer to page 4 of the MAC7200 Owner's Manual for addition cable information.